


HYDROPIG SILICONE CARBIDE POLLY PIG (HPSC)

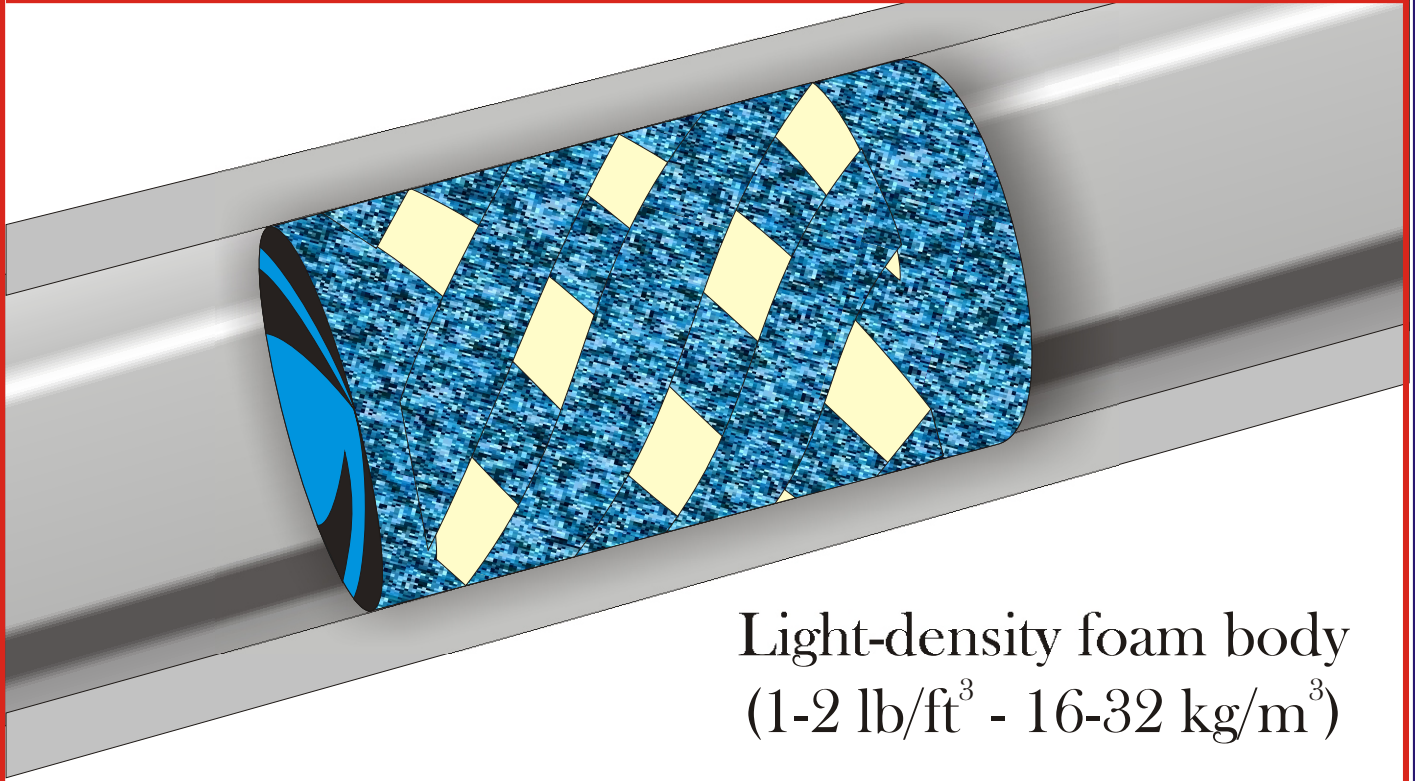

Light-density foam body
(1-2 lb/ft³ - 16-32 kg/m³)

The Knapp Hydropig Silicone Carbide Polly Pig offers the pipeline operator a scraping pig with maximum flexibility that is able to negotiate extreme reductions in cross-sectional diameter as well as tight bends in pipelines. Manufactured with chips of silicone carbide embedded in the flexible blue coating, the Hydropig Silicone Carbide is capable of light duty scraping in pipelines. It is available with each end flat or tapered.

*Note: The HPSC Polly Pig should not be used in non-metallic piping as it will physically scratch the pipe wall, creating an anchor point for future scale or deposit formation

KNAPPTM
POLLY PIG

Knapp Document No. KPP-5D-p1-02, 9-6-00

e-mail: knapp@pollypig.com
www.pollypig.com

1209 Hardy Street
Houston, TX 77020
Tel: 800/231-7205
713/222-0146
Fax: 713/222-7403

©1995-2000 KNAPP POLLY PIG, INC.