


# *HYDROPIG WIRE BRUSH POLLY PIG (HPWB)*

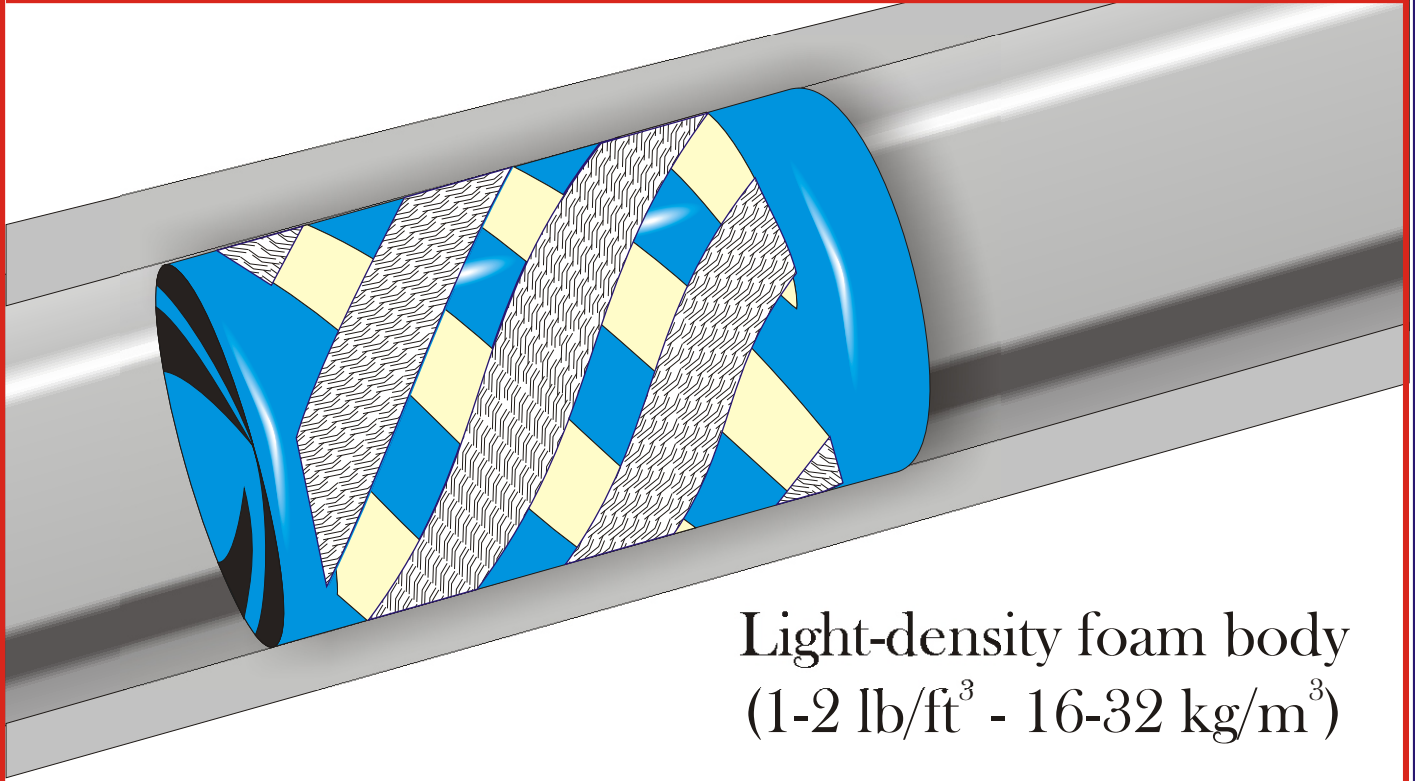

Light-density foam body  
(1-2 lb/ft<sup>3</sup> - 16-32 kg/m<sup>3</sup>)

The Knapp Hydropig Wire Brush Polly Pig offers the pipeline operator a pig with maximum flexibility that is able to negotiate extreme reductions in cross-sectional diameter as well as tight bends in pipelines. Manufactured with straps of flame hardened steel wire brushes, the Hydropig Wire Brush is capable of light duty scraping in pipelines. The Hydropig Wire Brush's flexible blue coating gives an extra measure of abrasion resistance to the light density swab body. It is available with each end flat or tapered.

\*Note: The HPWB Polly Pig should not be used in non-metallic piping as it will physically scratch the pipe wall, creating an anchor point for future scale or deposit formation

**KNAPP**<sup>TM</sup>  
**POLLY PIG**

Knapp Document No. KPP-5E-p1-02, 9-6-00

e-mail: [knapp@pollypig.com](mailto:knapp@pollypig.com)  
[www.pollypig.com](http://www.pollypig.com)

1209 Hardy Street  
Houston, TX 77020  
Tel: 800/231-7205  
713/222-0146  
Fax: 713/222-7403

©1995-2000 KNAPP POLLY PIG, INC.